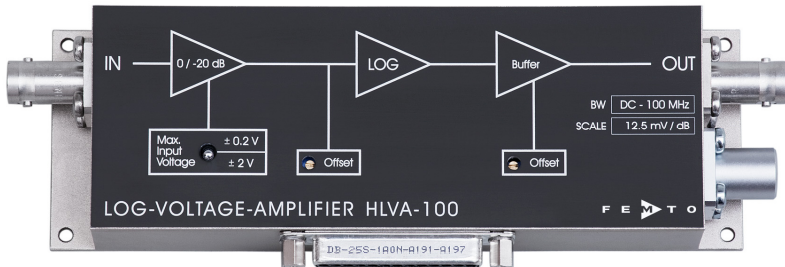
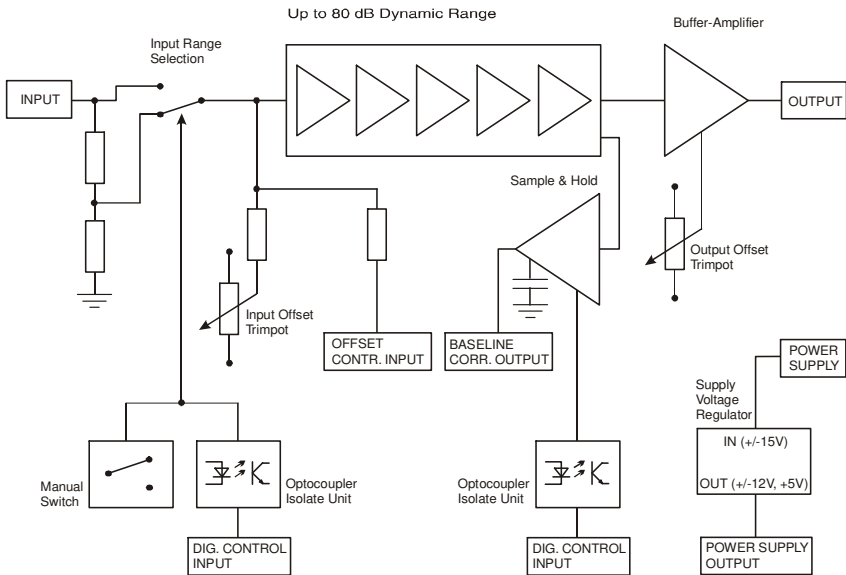


Datasheet		HLVA-100	
Logarithmic Wideband Voltage Amplifier 			
Features	• Wide Dynamic Range typ. 60 dB, max. 80 dB, • 5 ns Rise/Fall Time @ 40 dB step • Accuracy ± 1 dB @ pulse width of min. 20 ns • Switchable Input Range $\pm 20 \mu\text{V}$... $\pm 200 \text{ mV}$ or $\pm 200 \mu\text{V}$... $\pm 2 \text{ V}$ • DC coupled input • Local and Remote Control • Integrated Sample & Hold Baseline Correction		
Applications	• LIDAR systems • Signal Compression, Pulse Measurements • Time-Resolved Pulse and Transient Measurements • Mass Spectroscopy • Particle Detection		
Block Diagram	 BS01-0550-12		
SOPHISTICATED TOOLS FOR SIGNAL RECOVERY		F E M T O	

Logarithmic Wideband Voltage Amplifier

Specifications	Test Conditions	$V_s = \pm 15\text{ V}$, $T_a = 25^\circ\text{C}$, System Impedance = $50\ \Omega$
Dynamic Performance	Dynamic Range	typ. 60 dB (for accurate amplitude measurements) max. 80 dB (signal detection)
	Input Voltage Range	$\pm 20\ \mu\text{V} \dots \pm 200\ \text{mV}$ / $\pm 200\ \mu\text{V} \dots \pm 2\ \text{V}$ switchable
	Scaling	12.5 mV/dB equals 250 mV/ decade (@ $50\ \Omega$ Load)
	Linearity	$\pm 1\ \text{dB}$ (for pulse of min. 20 ns pulse width)
Pulse Response	Rise/Fall time	5 ns @ 40 dB step
Input	Input Impedance	$50\ \Omega$
	Input Voltage Drift	$0.6\ \mu\text{V/K}$
	Equivalent Input Voltage Noise	$2\ \text{nV}/\sqrt{\text{Hz}}$
	Input BIAS Current	$< 4\ \mu\text{A}$
	Input Offset Voltage	$\pm 2.5\ \text{mV}$, adjustable by Offset-Trimpot and external Control Voltage
Output	Output Impedance	$50\ \Omega$
	Output Voltage Range	$+50 \dots +1075\ \text{mV}$ typ. (@ $50\ \Omega$ Load) (if Output is adjusted to 1V at 100mV Input)
	Output Offset Voltage Range	$\pm 500\ \text{mV}$, adjustable by Offset-Trimmer
Digital Control	Control Input Voltage Range	Low: $-0.8 \dots +0.8\ \text{V}$ High: $+3 \dots +12\ \text{V}$, TTL / CMOS compatible
	Control Input Current	Low: 0 mA High: $+1.5\ \text{mA}$ @ $+5\ \text{V}$ (Input Range Control) $+7\ \text{mA}$ @ $+5\ \text{V}$ (Baseline Correction Control)
Baseline Correction	Acquisition Time	$30\ \mu\text{s}$ (min. sample pulse width)
	Baseline Hold Droop Rate	$1\ \mu\text{V/s}$ (typ. @ 25°C)
	Loop cut-off frequency	1.5 kHz
Ext. Offset Control	Control Voltage Range	$\pm 10\ \text{V}$ (for $\pm 2.5\ \text{mV}$ Offset Control)
	Offset Control Input Impedance	$100\ \text{k}\Omega$
Power Supply	Supply Voltage	$\pm 15\ \text{V}$
	Supply Current	$+90 / -120\ \text{mA}$ typ.
	Stabilized Power Supply Output	$\pm 12\ \text{V}$ / max. 100 mA, $+5\ \text{V}$ / max. 50 mA
Case	Weight	320 gr. (0.74 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature	$-40 \dots +100\ ^\circ\text{C}$
	Operating Temperature	$0 \dots +60\ ^\circ\text{C}$
Absolute Maximum Ratings	Power Supply Voltage	$\pm 20\ \text{V}$
	Signal Input Voltage	$\pm 3\ \text{V}$ @ $\pm 2\ \text{V}$ Input Range Setting $-3\ \text{V} / +300\ \text{mV}$ @ $\pm 200\ \text{mV}$ Input Range Setting
	Digital Control Input Voltage	$+16\ \text{V} / -5\ \text{V}$

Logarithmic Wideband Voltage Amplifier

Connectors	Input Output Power Supply Control Port	BNC BNC LEMO Series 1S, 3-pin fixed Socket Pin 1: + 15V Pin 2: - 15V Pin 3: GND Sub-D 25-pin, female, Qual. Class 2 Pin 1: +12V (Stabilized Power Supply Output) Pin 2: -12V (Stabilized Power Supply Output) Pin 3: AGND (Analog Ground) Pin 4: +5V (Stabilized Power Supply Output) Pin 5 - 6: NC Pin 7: Baseline Correction Output Pin 8: Offset Control Voltage Input Pin 9: DGND (Ground f. Digital Control Pin 10 - 25) Pin 10: Digital Control Input: Input Voltage Range Pin 11: Digital Control Input: Baseline Correction Pin 12 - 25: NC
Remote Control Operation	Input Range Setting Baseline Correction	Remote control input is opto-isolated and connected by logical OR to local switch setting. For remote control the switch setting, set the local switch to " $\pm 2\text{ V}$ " and select the wanted setting via a bit-code at the digital input. Input Range Pin 10 $\pm 2\text{ V}$ Low $\pm 200\text{ mV}$ High The integrated auto-null function can be performed by remote digital control only. The input is opto-isolated by a ultra-fast opto-coupler. Please note the min. pulse width. Function Pin 11 Hold previous value Low Null Output High


Datasheet

HLVA-100


Logarithmic Wideband
Voltage Amplifier

Typical Performance
Characteristics

Logarithmic Response (@ ± 2 V Input Range Setting)

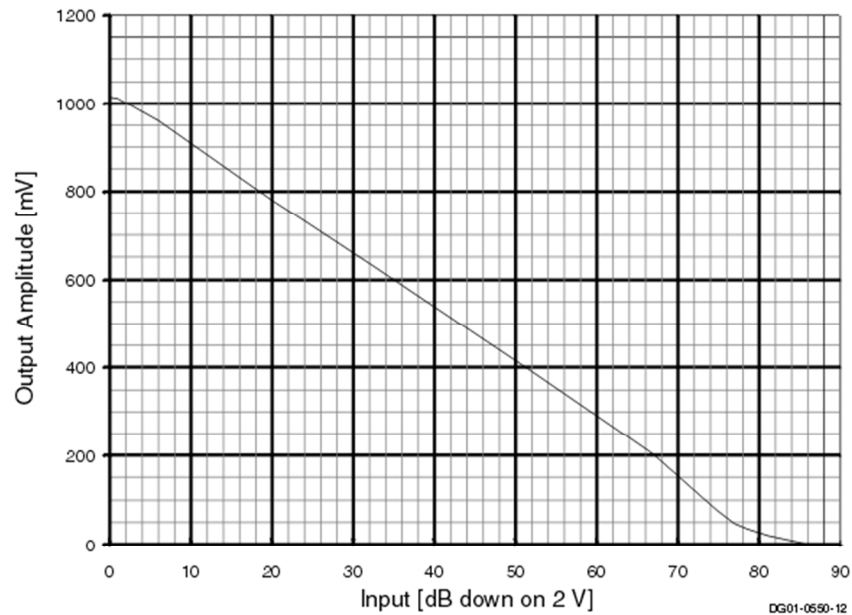

Dimensions

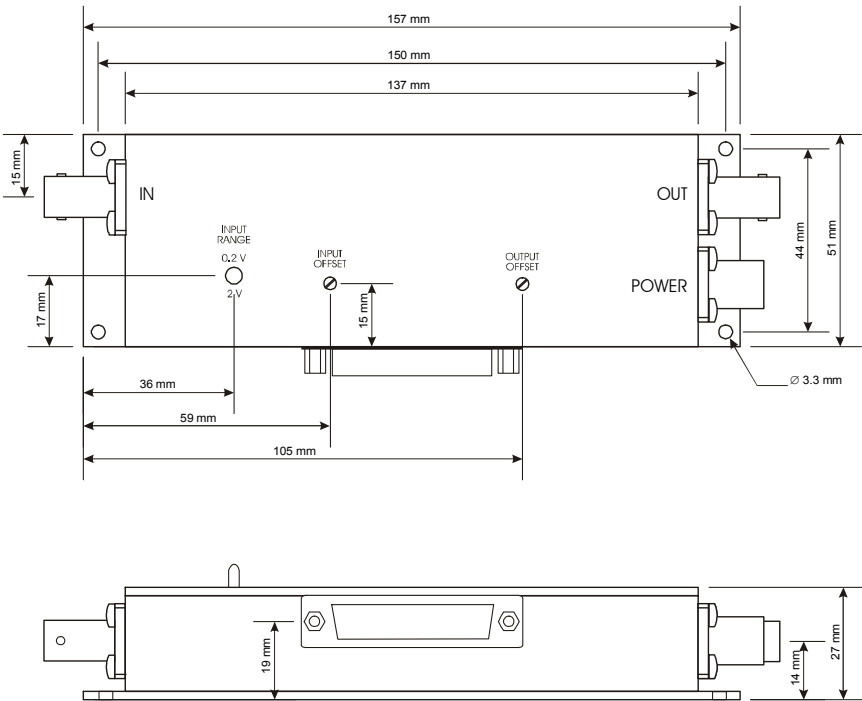

FEMTO Messtechnik GmbH
Klosterstr. 64
D-10179 Berlin • Germany
Tel.: +49-(0)30-280 4711-0
Fax: +49-(0)30-280 4711-11
e-mail: info@femto.de
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.
© by FEMTO Messtechnik GmbH
Printed in Germany