


Technical specifications Version 1.0

NO-B4 Nitric Oxide Sensor – 4-Electrode

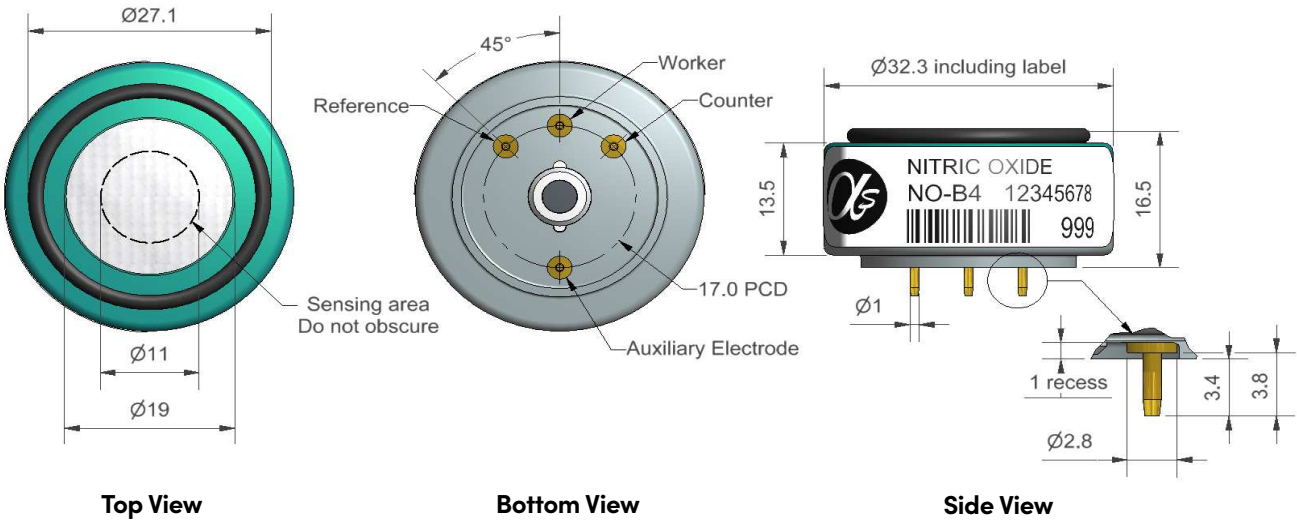

Dimensions are in millimetres (± 0.1 mm).

Performance		Sensitivity	nA/ppm in 2ppm NO	500 to 850
		Response time	t90 (s) from zero to 2ppm NO	< 45
		Zero current	nA in zero air at 20°C	30 to 200
		Noise*	± 2 standard deviations (ppb equivalent)	15
		Range	ppm NO limit of performance warranty	20
		Linearity	ppb error at full scale, linear at zero and 5ppm NO	< ± 1
		Overgas limit	maximum ppm for stable response to gas pulse	50
		*Tested with Alphasense IBS low noise circuit		
Lifetime		Zero drift	ppb equivalent change/year in lab air	0 to 50
		Sensitivity drift	% change/year in lab air, monthly test	0 to -20
		Operating life	months until 50% original signal (24-month warranted)	> 24
Environmental		Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 2ppm NO	60 to 90
		Sensitivity @ 40°C	% (output @ 50°C/output @ 20°C) @ 2ppm NO	97 to 110
		Zero @ -20°C	nA	0 to 30
		Zero @ 40°C	nA	100 to 200
Cross Sensitivity		H ₂ S sensitivity	% measured gas @ 5ppm	H ₂ S (after 3 mins) < -10
		NO ₂ sensitivity	% measured gas @ 5ppm	NO ₂ (after 3 mins) < 4
		Cl ₂ sensitivity	% measured gas @ 5ppm	Cl ₂ < 3
		SO ₂ sensitivity	% measured gas @ 5ppm	SO ₂ < 5
		H ₂ sensitivity	% measured gas @ 100ppm	H ₂ < 0.1
		CO sensitivity	% measured gas @ 5ppm	CO < 0.3
		NH ₃ sensitivity	% measured gas @ 5ppm	NH ₃ < 0.1
		CO ₂ sensitivity	% measured gas @ 5% volume	CO ₂ < 0.1
		O ₃ sensitivity	% measured gas @ 100ppb	O ₃ < 4
		Halothane sensitivity	@ 100ppm	Halothane < 0.1
Key Specifications		Bias voltage	mV (working electrode potential is above reference electrode)	+200
		Temperature range	°C	-30 to 50
		Pressure range	kPa	80 to 120
		Humidity range	% rh continuous	15 to 85
		Storage period	months @ 3 to 20°C (stored in sealed pot)	6
		Load resistor	Ω (AFE circuit is recommended)	33 to 100
		Weight	g	< 6

Figure 1 Sensitivity Temperature Dependence

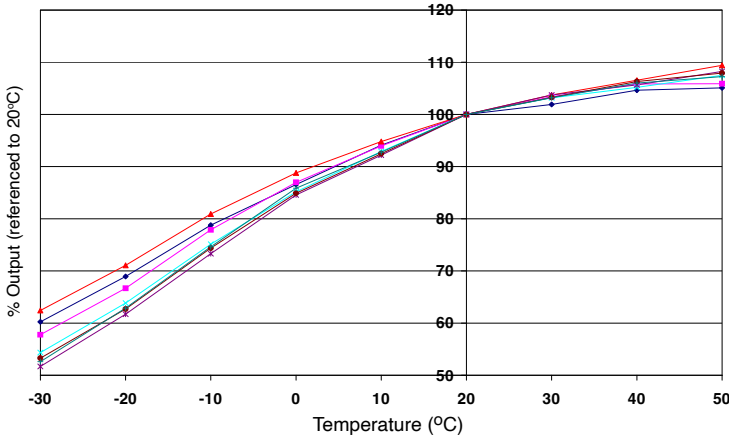


Figure 1 shows the temperature dependence of sensitivity at 2ppm NO.
This data is taken from a typical batch of sensors.

Figure 2 Zero Temperature Dependence

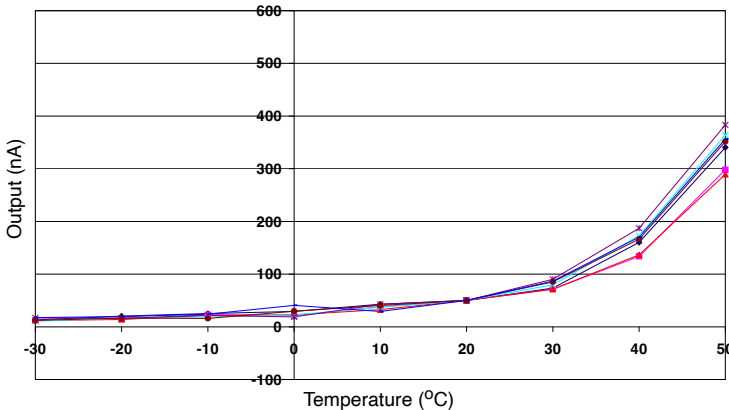


Figure 2 shows the variation in zero output of the working electrode caused by changes in temperature, expressed as nA.
This data is taken from a typical batch of sensors.
Contact Alphasense for further information on zero current correction.

Figure 3 Response to 200ppb NO

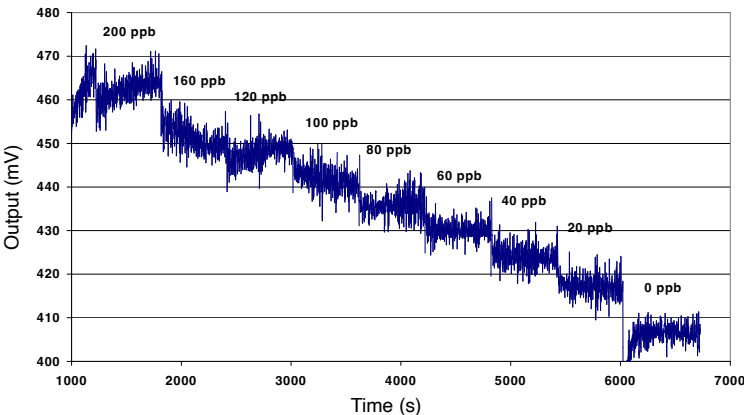


Figure 3 shows response to 200ppb NO.
Use of Alphasense ISB circuit reduces noise to 15ppb with the opportunity of digital smooting to reduce noise even further.

NOTE: All sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions. NOTE: all sensors are tested at ambient environmental conditions unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within.(©ALPHASENSE LTD) Doc. Ref. NO-B4/OCT22