


# Blue High-Power Laser Diode OEM Modules

MONOPOWER™-405-50/100/150-MM

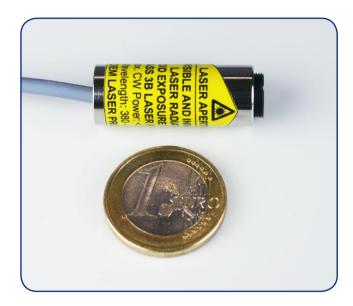


## **Features**

- High Power in the Blue Region
- Well Collimated Beam
- Long Life Time
- Extremely Compact

## **Options**

- Housing with TEC Cooling
- Temperature Tuning of the Central Wavelength (±1 nm)
- Variable Output Power
- Compliance with IEC/EN 60825-1 Laser Safety Standards (e.g. for Non-OEM Customers)

<b>Laser Specifications</b>	(Typical Values)
Wavelength	405 nm (±5 nm)
Output Power	50, 100 or 150 mW (depending on the model)
Beam Spot	Elliptical, $2 \times 3$ mm at 1 m distance
Divergence	1 mrad
Spectral Width (FWHM)	< 0.3 nm
Weight	12 g
Dimensions	Ø 12 × 33 mm
Laser Class	Class 3B Laser Product

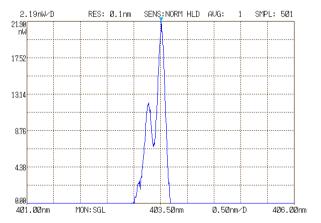

Typical Emission Spectrum at 50 mW Optical Power

# **Laser Diode Driver Specifications**

Voltage Input	Universal, 100 - 230 V AC
<b>Power Consumption</b>	< 5 W
Dimensions (W×H×L)	$105 \times 44 \times 105 \text{ mm}^3$



### **Laser Safety Note**

These OEM modules are sold to other manufacturers for use as components in their own laser systems. They are not subject to IEC/EN 60825–1, since the final product will itself be subject to the applicable laser safety standards.

LASER APERTURE
VISIBLE AND INVISIBLE
LASER RADIATION
AVOID EXPOSURE TO BEAM
CLASS 3B LASER PRODUCT
Max. CW Power: < 200 mW
Wavelength: 380 - 420 nm
OEM LASER PRODUCT

ALPHALAS GMBH Bertha-von-Suttner-Str. 5 D-37085 Goettingen Germany TEL +49 - 551 - 77 06 147 FAX +49 - 551 - 77 06 146 E-MAIL sales@alphalas.com WEB www.alphalas.com

Lasers, Optics, Electronics.

Made in Germany.

www.alphalas.com



\_opyright © ALPHALAS GmbH. Printed in Germany. MONOPOWER--405-50/100/150-MM\_081020