


## M2A Series

5 Socket M12, Polycarbonate Molded Connector, with 2 Live Sockets, Permanent Mount, 250 °F (121 °C) Max Temp



### Product Features

- ▶ 5 Socket M12 Connection with 2 Live Sockets, for use with CTC Single Axis, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability & Corrosion Resistance

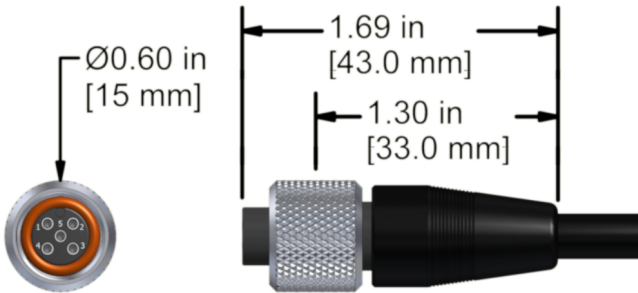

### Specifications

|                           |                                         |
|---------------------------|-----------------------------------------|
| Application               | Portable Measurement<br>Permanent Mount |
| Max Temperature           | 250° F (121° C)                         |
| Connector Type            | 5 Socket M12 Connector                  |
| Shell Material            | Polycarbonate Molded                    |
| Connector Insert Material | Polycarbonate                           |
| Rating                    | IP68                                    |
| Pin-Out                   | 1 = Signal (+)<br>2 = Common (-)        |

Built to Order