



Greyline

ISM 5.0

Technical Specifications:

The Greyline ISM 5.0 Insertion Magmeter senses flow using a low maintenance electromagnetic design with no moving parts. The dual-electrode sensor and continuous auto-zero function provides high accuracy – even at low-flow rates.




GENERAL SPECIFICATIONS

Flow Measurement Range:	0.031 m/s to 6.2 m/s (0.1 ft/s to 20 ft/s), 200:1 turndown
Accuracy:	<ul style="list-style-type: none"> • $\pm 1.0\%$ of reading from 0.61 m/s to 6.2 m/s (2 ft/s to 20 ft/s) • ± 0.0061 m/s (0.2 ft/s) below 0.61 m/s (2 ft/s)
Nominal Pipe Diameter:	76.2 mm to 1.8 m (3 in to 6 ft)
Liquid Temperature Range:	-26 °C to +121°C (-15 °F to +250 °F)
Operating Temp. (Electronics):	-28 °C to +65°C (-20 °F to +150°F)
Maximum Operating Pressure:	14 bar (200 psi)
Pressure Drop:	Less than 0.007 bar (0.1 psi) at 3.6 m/s (12 ft/s)
Conductivity Range:	20-60,000 μ Siemens/cm
Power Input:	20-28 V DC, 250mA at 24 V DC (6 Watts) 20-28V AC, 50-60Hz, 8VA
Analog Output:	Selectable 4-20mA, 0-5 V or 0-10 V
Frequency Output:	0-15 V peak pulse, 0-500 Hz
Scalable Pulse Output:	<ul style="list-style-type: none"> • Isolated solid state dry contact rated 50 V DC, 100mA • maximum Pulse duration: 0.5 sec, 1 sec, 2 sec, or 6 sec
Signal Cable Length:	7.6 m (25 ft) PVC jacketed multi-conductor
Electronics Enclosure:	IP68 powder-coated cast aluminum
Wetted Materials:	316 L stainless steel, polypropylene
Approximate Shipping Weight:	2.7 kg (6 lb)

POPULAR OPTIONS

Model ISM 5.0-B:	For bi-directional flow
Extra Sensor Cable:	Separate length 7.6 m, 15.2 m, or 30.5 m (25 ft, 50 ft, or 100 ft) PVC jacketed multi-conductor
Standard Installation Hardware Kit:	Threaded branch outlet, close nipple, 1 in full port isolation valve
Hot Tap Installation Hardware Kit:	31.8 mm (1.3 in) branch outlet, close nipple, 31.8 mm (1.3 in) full port ball valve
Grounding Rings:	ANSI Class 150, 316 Stainless Steel from 76.2 mm to 1.1 m (3 in to 3.5 ft) nominal size
Grounding Probes:	Hot Tap, stainless steel
Remote Displays:	<ul style="list-style-type: none"> • D-100-MOD rate/total display with 2 analog inputs, Modbus RTU or TCP/IP • DB-1201-01 LCD with flow direction LED's

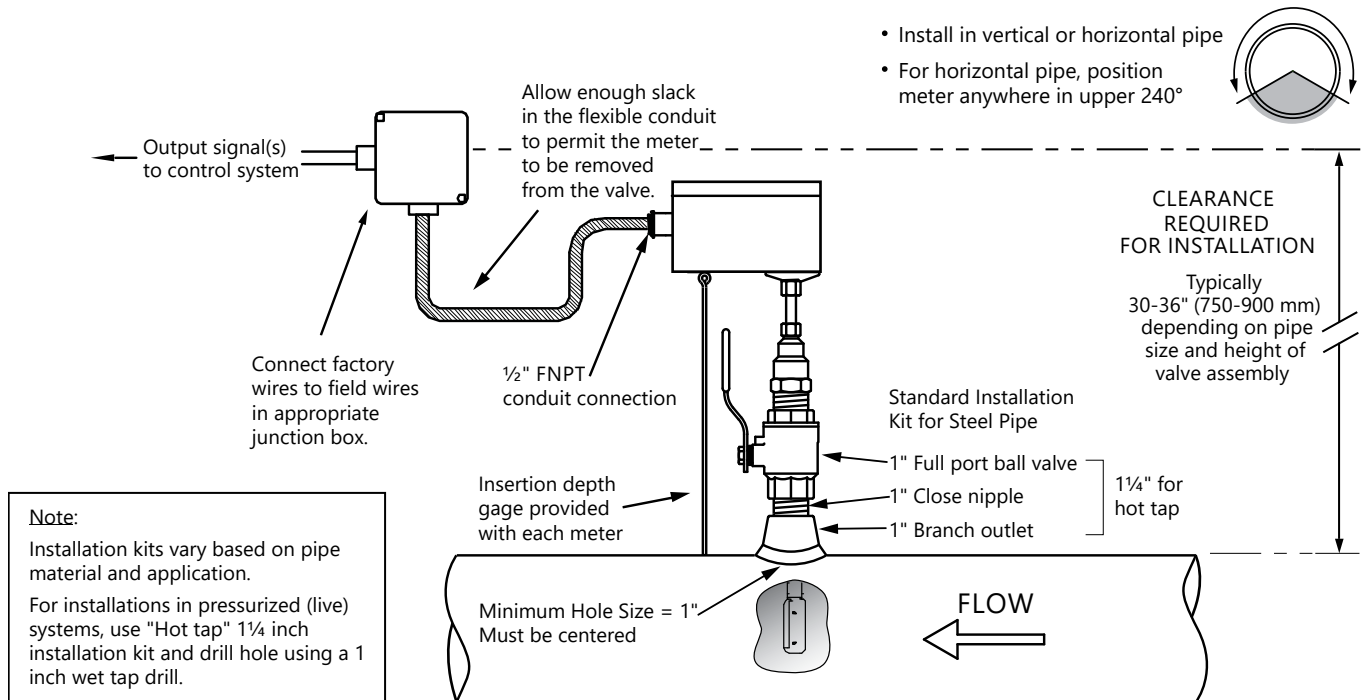

Delivering the Measure of Possibility

Pulsar Measurement offers worldwide professional support for all of our products, and our network of global partners all offer full support and training. Our facilities in Malvern, UK and Largo, USA are home to technical support teams who are always available to answer your call or attend your site when required. Our global presence, with direct offices in the UK, USA, Canada, and Malaysia, allows us to create close relationships with our customers and provide service, support, training, and information throughout the lifetime of your product.

By taking a step forward in echo processing technology, Pulsar Measurement addresses applications previously thought to be beyond the scope of ultrasonic measurement. This technology improves signal processing at the transducer head which has made it possible to increase resistance to electrical noise, enabling the transducer to 'zone in' on the true echo.

For more information, please visit our website:

www.pulsarmeasurement.com



INFO@PULSARMEASUREMENT.COM

Pulsar Measurement is a trading name of Pulsar Process Measurement, Ltd.

Copyright © 2021 Pulsar Measurement
Registered Address: 1 Chamberlain Square CS, Birmingham B3 3AX
Registered No.: 3345604 England & Wales

United States
+1 888-473-9546

Asia
+60 102 591 332

Canada
+1 855-300-9151

Oceania
+61 428 692 274

United Kingdom
+44 (0) 1684 891371

pulsarmeasurement.com